


- 100 % Product Inspection
- Regulation Compliance
- Quantity Verification

Applications:

- Industrial & Food
- Postal
- Packaging

Up To .01 lb or 4.5 gram accuracy*

HS Dynamic In-Motion Caseweigher

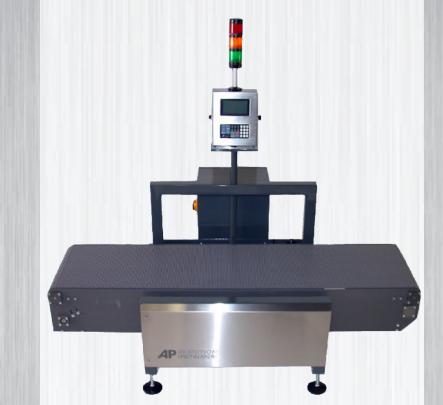



"Redefining Dynamic Weighing"


www.apdataweigh.com

HS Dynamic In-Motion Caseweigher

Established in 1994, AP Dataweigh, Inc. is a checkweigher manufacturer offering a complete line of custom-built, dynamic checkweighers capable of addressing the needs of the pharmaceutical, food, agricultural and industrial product markets. We provide custom solutions to regulation compliance, quantity verification, weight sorting, missing component inspection and out-of-tolerance checkweighing. AP In-Motion Checkweighers are built to customer specification and designed to integrate into a number of applications including logistics and distribution, consumer packaging, material handling and food processing. We distinguish ourselves by making what customers need instead of trying to sell what we make – a subtle distinction, but one which we feel makes all the difference.

Dynamic checkweighing solutions for your exact application and product line

The HS High Speed Caseweigher incorporates the latest technology of high speed electronics and software-based control systems. In today's automation age, conveyors are running faster than ever, and the HS caseweigher doubles or triples output. The unit smoothly transfers products onto and off the weigh cell to ensure accurate weight measurement at speeds unattainable for traditional caseweighers. The HS Caseweighers are receiving high marks for reliability, accuracy* and ease of operation from Fortune 100 companies.



GSE Controller Features

Stainless Steel IP65 Enclosure Password Protected Parameter Menu 4 Programmable RS-232 Comm. Ports 4 - I/O Modules (Expandable to 128) Full digital Front Panel Calibration Bright Operator Prompting LCD Display (665) Software Based operating system I/O Timer 10 ms 3 Zone Under/Over/Accept Select Display Units in g, Ibs, oz, kg

Specifications

Up to 80 products per minute Up to .01 lb. or 4.5 gram accuracy* Choice of Belt Widths & Line Heights Up to 200 lb. Capacity 60-second Calibration

Options

Stainless Steel Powder Coated Mild Steel Construction Networking - Printers - Sorting Rejection System - Stack Lights Lid Detect - Label Detect Automatic Dimensioning Metal Detector

Communication Options

Ethernet - DeviceNet - Profibus Modbus - Serial RS-232 & RS-485 Can-Open - Analog

*All accuracy and repeatability values are verifiable in our factory environment. Results may vary in different environmental conditions. AP Dataweigh, Inc. 2730 Northgate Court • Cumming, Ga. 30041 678-679-8000 • 1-877-409-2562 sales@apdataweigh.com www.apdataweigh.com